


# **EFO Bluetooth Keyboard / HTPC Remote**

**Operation Manual - Version 1.0**

Let’s familiarize ourselves with EFO Bluetooth Keyboard:

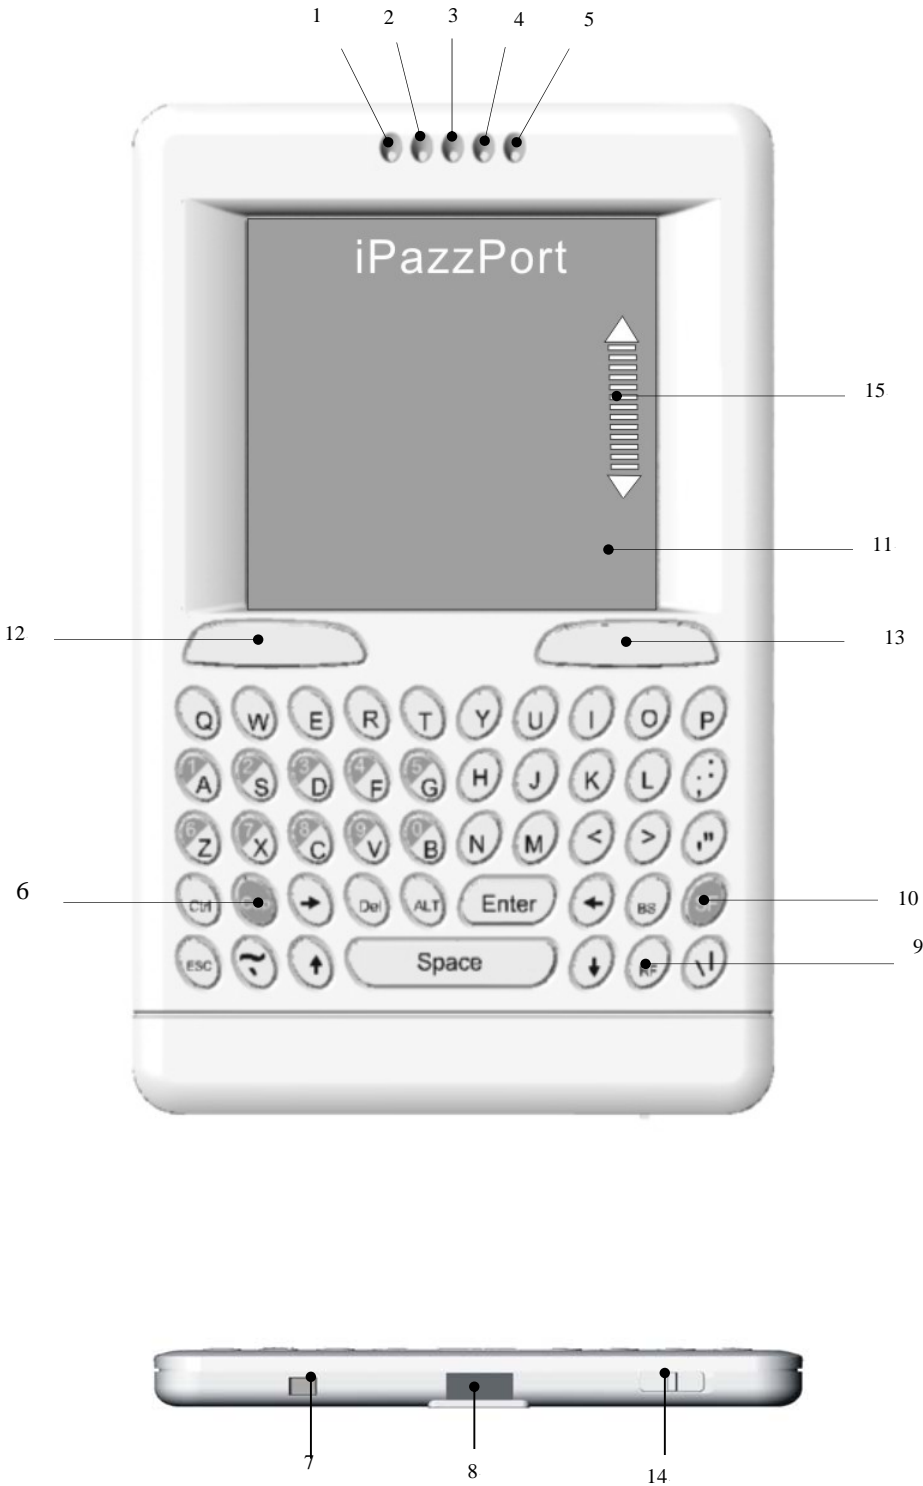

| NUMBERED<br>FEATURE | FUNCTION                                  | OPERATION  |
|---------------------|---|--|
| LED 1               | RECHARGER INDICATOR                       | LIGHT GOES OUT WHEN FULLY CHARGED  |
| LED 2               | CONNECTED TO<br>EXTERNAL POWER<br>SOURCE  | LIGHTS WHEN CONNECTED  |
| LED 3               | CONNECTION ESTABLISH<br>STATUS INDICATOR  | BLINKS WHEN BUILDING CONNECTION, AND<br>GOES OUT WHEN CONNECTION ESTABLISHED.  |
| LED 4               | INPUT SWITCH KEY                          | LIGHT ON WHEN CHANGE TO SWITCH KEY<br>INPUT MODE   |
| LED 5               | CAPS LOCK INPUT                           | LIGHT ON WHEN CHANGE TO CAPS LOCK INPUT<br>MODE.   |
| ARROW 6             | CAPS LOCK KEY                             | CAPS LOCK ON/OFF SWITCH KEY, WATCH LED #<br>5  |
| ARROW 7             | CONNECTION ESTABLISH<br>BUTTON            | PRESS TO RE-ESTABLISH CONNECTION IF<br>DEVICES DISCONNECTED FOR SOME REASON  |
| ARROW 8             | MINI USB JACK                             | FOR RECHARGE   |
| ARROW 9             | BACK LIGHT FOR<br>KEYBOARD                | TURNES BACK LIGHT ON/OFF BY PRESSING THIS<br>KEY   |
| ARROW 10            | THE SF KEY IS FOR THE<br>INPUT SWITCH KEY | MOST KEYS HAVE TWO INPUT OPTIONS. PRESS<br>THIS KEY WHEN YOU WANT TO SWITCH TO THE<br>SECOND KEY MEANING. WATCH LED4 |
| ARROW 11            | MOUSE TOUCHPAD                            | SLIDING YOUR FINGER ACROSS PAD MOVES THE<br>MOUSE  |
| ARROW 12            | LEFT MOUSE BUTTON                         | OPERATES LIKE LEFT MOUSE BUTTON  |
| ARROW 13            | RIGHT MOUSE BUTTON                        | OPERATE LIKE RIGHT MOUSE BUTTON  |
| ARROW 14            | POWER SWITCH                              | TURNES UNIT ON AND OFF   |
| ARROW 15            | SCROLL BAR                                | PULL PAGE UP OR DOWN BY SLIDE YOUR<br>FINGER ON THIS AREA  |

Note: The following keys operate identically to the standard keys on a personal computer keyboard: **Ctrl; Esc; Del; Enter; BS(Backspace); ↑; ↓; ←; →; Alt;**

## What is EFO Bluetooth Keyboard and what is it for?

**EFO Bluetooth Keyboard** is also known as Bluetooth Handheld Keyboard and Mouse Touchpad, it is the smallest wireless keyboard and mouse touchpad in the world for the moment, with built-in Bluetooth Device, **EFO Bluetooth Keyboard** provides wireless short range communication with other Bluetooth device instead of physical cable connection that traditionally link electronic devices.

As a compromise of Bluetooth Technology, QWERTY keyboard, and mouse touchpad, **EFO Bluetooth Keyboard** provides a so much convenient and capable tool for:

- The one who want to be apart from his computer yet must control it for his presentation, lecturing, teaching and training with large screen or projector. With **EFO Bluetooth Keyboard** you can go around and communicate with your people to make your presentation lively, and create a good atmosphere for your presentation.
- The one who want to sit in his easy and comfortable chair to enjoy his Home Theater Personal Computer, or view internet content, IPTV, even chat with your family or friends via Skype, MSN ...and so on.

**EFO Bluetooth Keyboard** provides a good solution of wireless operation for the computer, It is really a computer remote controller.

## What's in your Package?

In the package with **EFO Bluetooth Keyboard**, you will find a USB cable for charging the **EFO Bluetooth Keyboard** and this manual.

## Features and specifications:

- Bluetooth remote controls of your computer with distance about 10M.
- Smart and portable size: 85mm x 135mm x 10mm
- Backlit keyboard for the convenient operation in darkened room
- Large PAD for hand writing.
- Bluetooth standard: Bluetooth V2.0; HID V1.0
- QWERTY keyboard
- Weight: 60g

## Starting with EFO Bluetooth Keyboard:

**1. Pairing and establishing connection.** Let's take Microsoft Bluetooth Software as an example to describe Bluetooth Search, Pairing and Connection. Other Bluetooth software please refers to its own user manual.

- turn on **EFO Bluetooth Keyboard** by moving the power switch to ON, see arrow 14
- Click "Start", ➔ "Control Panel" (make sure you're in Classic View), and then double-click Bluetooth Devices.
- Click "Add".

- In the Add Bluetooth Device Wizard, select the “**My device is set up and ready to be found check box**”, and then click “**Next**”.
- After icon of “**Bluetooth Wireless Keyboard**” appear, click “**Bluetooth Wireless Keyboard**”, and then click “**Next**”.
- When the wizard asks you which passkey you want to use, click “**Choose a passkey for me**”. Then click “**Next**”.
- After you are prompted to enter your passkey, you must manually type the passkey on **EFO Bluetooth Keyboard**, and then press Enter. (! **Important**: When you are prompted to type a passkey, you must do so and press **Enter** within 30 seconds.)
- In the final page of the wizard, click Finish, and then click OK. **EFO Bluetooth Keyboard** should now be successfully paired with your PC and ready to use.
- 1.9 LED3 will go out when connection is established successfully

## 2. Arrow 10 points to the Input Switch Key

- When this key is pressed LED 4 will light up. This LED will stay on until this key is pressed again. That means while this light is on any key you press will use its secondary input rather than its primary input. For example the key B is normally B or b, but when you press the SF key it becomes the number 0. When you have selected the Input Switch Key LED 5 will light up. When you are in normal mode LED 5 will be turned off.


## 3. Switch between upper-case and lower-case input mode: If you are in lower-case input mode, press key

- This way you can turn to upper-case input mode, LED 5 will light up, In order to return to lower-case input mode pressing the key again after you completed your upper-case input, the LED 5 goes out.

## 4. Recharge your EFO Bluetooth Keyboard:

- **EFO Bluetooth Keyboard** is equipped with a rechargeable battery, this way when it is out of power or it is in low voltage and needs to be recharged, we have supplied you a USB cable, plug mini USB into mini USB jack on the **EFO Bluetooth Keyboard**, and another end to your PC USB port, it means recharging when LED1 and LED2 light up. LED1 will go out when it is fully recharged. If you unplug the mini USB from your PC, the LED2 will go out too, as indicated by arrow 14 above. During charging, LED 1 & 2 will light up with a steady on.

## 5. Active the backlit:

- If you wish to operate this **EFO Bluetooth Keyboard** in a darkened room then you will want to use the Backlight Keyboard feature. In order to activate the Backlight feature please press  indicated by arrow 9. Press this key again, backlit will go out.

6. The Touch Mouse Pad (TMP) is quite versatile. To create input with the TMP place your finger on the pad. Just move your finger on the TMP as though you were using your mouse pad. Watch the mouse move to where you

want it, then use the keyboard for whatever action you desire. You can draw patterns using the TMP if you have installed MS Paint, ScreenPen or other Paint software.

7. **Scroll your file or web page:** EFO Bluetooth Keyboard provides a scroll bar on the touchpad indicated by arrow 15, put your finger on scroll bar and slide your finger, this way you can view your page quickly.

#### WEEE Directive & Product Disposal



At the end of its serviceable life, this product should not be treated as household or general waste. It should be handed over to the applicable collection point for the recycling of electrical and electronic equipment, or returned to the supplier for disposal.

---

#### Notice to customers



This symbol on the battery indicates that the battery is to be collected separately.

The following apply only to users in European countries.

- This battery is designed for separate collection at an appropriate collection point. Do not dispose of as household waste
- For more information, contact the retailer or local authorities in charge of waste management.

---

#### Caution :

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

#### Compliance statement:

1: This device is verified to comply with Part 15 of the FCC Rules. Operation subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

2: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is ] connected.
- Consult the dealer or an experienced radio/TV technician for help